




Our retail price is a recommendation only. Prices in offer may differ. All prices indicated 0,00 € will follow in the offer.

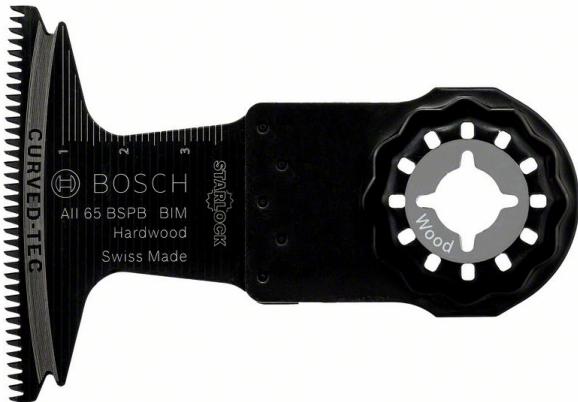

ROBERT BOSCH POWER TOOLS GMBH
BIM PLUNGE CUT SAW BLADE ALL 65
BSPB HARD WOOD. FOR OSCILLATING
MULTITOOLS

SKU: 3165140714167

BIM plunge cut saw blade All 65 BSPB Hard Wood. For oscillating multitools

Categories: [Accessories for BOSCH professional](#), [Accessories for multifunctional tools](#), [Saws](#)

Product Features: Material: BIM
Width [mm]: 65
Immersion depth [mm]: 40
Benefit HL (short): Long Life for Wide Cuts in Hardwood
Performance Claim Text: Long Life for Wide Cuts
(Version) Key RTB: BIM combination of an HCS blade and HSS teeth resists wear and heat
Specific RTB1: 3-dimensional Japanese tooth configuration minimises heat development for prolonged usage
Specific RTB2: Rounded cutting edge (Curved-Tec) ensures minimal tooth breakage and enhances durability
Specific RTB3: Starlock Snap-In mounting system for fast blade removal and exchange within 3 seconds without having to touch the blade
Material: Hardwood
Material: Solid Laminate Vinyl, PVC
Material: Plastic coated boards
Material: Softwood
SOL Date: 01.01.2016
Novelty: no

Scope of delivery:



25 ST BIM plunge cut saw blade All 65 BSPB Hard Wood. For oscillating multitools |

PRODUCT DESCRIPTION

The Starlock All 65 BSPB blade offers long life for wide cuts in hardwood. It has a robust BIM (bi-metal) combination of an HCS (high carbon steel) blade and HSS (high-speed steel) teeth to resist wear and heat. The Japanese tooth configuration of sharp ground teeth on the blades edge is ideal for hardwood. This 3-dimensional tooth arrangement minimises heat development while cutting, which keeps the blade from overheating and prolongs its usage. The blades rounded cutting edge (Curved-Tec) ensures minimal tooth breakage, which enhances the products durability. It is intended for plunge cutting in laminated panels or hardwood, for cutting recesses in furniture components and for flush cutting wooden components. The Starlock Snap-In mounting system allows fast blade removal and exchange within 3 seconds without having to touch the blade. The mounting system produces the highest power transfer thanks to a 3-dimensional tight-fitting connection between machine and accessory.

Article ID: 2608662032

PRODUCT DATASHEET LEGAL NOTE

Please note that the information on this datasheet is provided without warranty and is intended only as non-binding information about the product. Any liability for damages or losses that may arise from the use of this information is excluded. We therefore recommend that you verify the information on this datasheet with other sources before making any decisions based on this information. Additional information about the product can be found on our website.