




Our retail price is a recommendation only. Prices in offer may differ. All prices indicated 0,00 € will follow in the offer.

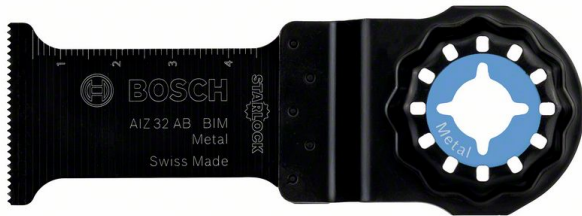

## ROBERT BOSCH POWER TOOLS GMBH BIM PLUNGE-CUTTING SAW BLADE AIZ 32 AB METAL. FOR OSCILLATING MULTITOOLS

**SKU:** 3165140665988

BIM plunge-cutting saw blade AIZ 32 AB  
Metal. For oscillating multitools

---

**Categories:** [Accessories for BOSCH professional](#), [Accessories for multifunctional tools](#), [Saws](#)

**Product Features:** Material: BIM  
Width [mm]: 32  
Immersion depth [mm]: 50  
Benefit HL (short): Long Life in Non-Hardened Metal  
Performance Claim Text: Long Life in Non-Hardened Metal  
(Version) Key RTB: BIM combination of an HCS blade and HSS teeth resists wear and heat  
Specific RTB1: Tapered-base body reduces jamming and minimises wear on blade  
Specific RTB2: Sturdy mounting system reduces wobbling for longer usage  
Specific RTB3: Starlock Snap-In mounting system for fast blade removal and exchange within 3 seconds without having to touch the blade  
Material: Non-ferrous metals  
SOL Date: 01.01.2016  
Novelty: no

Scope of delivery:  
25 ST BIM plunge-cutting saw blade AIZ 32 AB  
Metal. For oscillating multitools |



## PRODUCT DESCRIPTION

The Starlock AIZ 32 AB blade delivers long life when cutting in non-hardened metal. Its robust BIM (bi-metal) combination of an HCS (high carbon steel) blade and HSS (high-speed steel) teeth resists wear and heat in hard and abrasive materials. Its tapered-base body reduces jamming while removing material quickly, which minimises wear on the blade. The AIZ 32 AB has a sturdy mounting system that decreases wobbling to enable controlled cuts due to direct power transmission, which prolongs its use. This product is intended for flush cutting nails and copper pipes and for plunge cutting plasterboard. The Starlock Snap-In mounting system allows fast blade removal and exchange within 3 seconds without having to touch the blade. The mounting system produces the highest power transfer thanks to a 3-dimensional tight-fitting connection between machine and accessory.

Article ID: 2608661905

### PRODUCT DATASHEET LEGAL NOTE

Please note that the information on this datasheet is provided without warranty and is intended only as non-binding information about the product. Any liability for damages or losses that may arise from the use of this information is excluded. We therefore recommend that you verify the information on this datasheet with other sources before making any decisions based on this information. Additional information about the product can be found on our website.