




Our retail price is a recommendation only. Prices in offer may differ. All prices indicated 0,00 € will follow in the offer.

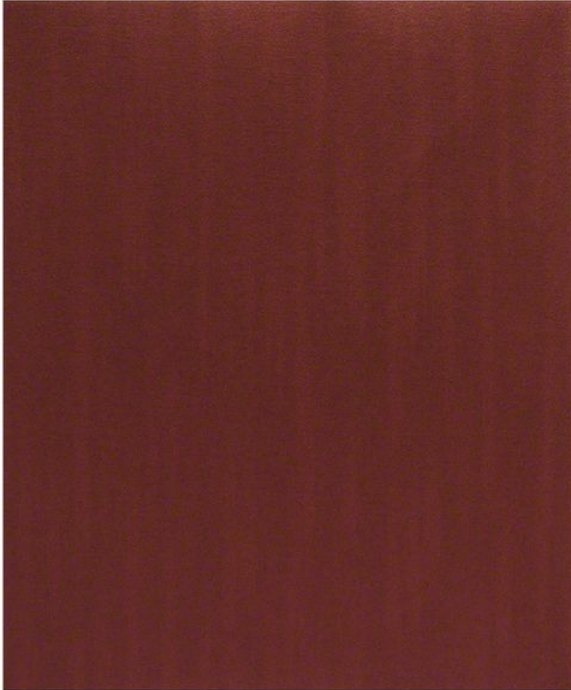

ROBERT BOSCH POWER TOOLS GMBH J475 SANDING SHEET. FOR HAND SANDING

SKU: 3165140678445

J475 sanding sheet. For hand sanding

Categories: [Accessories for BOSCH professional](#), [Grinding and polishing](#)

Product Features: Sheet dimensions, width mm: 230

Sheet dimensions, length mm: 280

Sheet dimensions mm: 230x280

Grit: 180

Perforation: no holes

Benefit HL (short): Excellent Finish

Performance Claim Text: Excellent Finish (Version) Key RTB: Flexible cloth backing delivers high work surface quality

Specific RTB1: Full resin bonding provides impressive grain adhesion for reliable and continuous work

Specific RTB2: Backing material is easily torn to size

Specific RTB3: J-cloth backing material with semi-friable aluminium oxide grit for high flexibility, durability and form accuracy

Material: Steel

Material: Aluminium

Material: Non-ferrous metals

Material: Cast iron

Product text, Accessories grey: Pack of 1

SOL Date: 01.07.2015

Novelty: no

Scope of delivery:

25 ST J475 sanding sheet. For hand sanding |



PRODUCT DESCRIPTION

The J475 Best for Metal produces an excellent finish when keying and sanding metal surfaces. It delivers a high workpiece surface quality finish due to its flexible cloth backing. The sheet's full resin bonding provides an impressive abrasive grain adhesion for reliable and continuous work. Furthermore, its backing material is easily torn for easy resizing in manual applications. It is very adaptable to contours and roundings and is intended for general sanding of metal, carbon steel, mild steel, stainless steel, titanium, aluminium, non-ferrous metals and cast iron surfaces. It is also ideal for deburring and rust removal on metal as well as keying sealing surfaces. This sheet is made from J-cloth, coated with tough semi-friable aluminium oxide grit for high flexibility, durability and form accuracy. It features an anti-static closed coating for optimal sanding results. Furthermore, the grit is bonded using fully synthetic resin for wear resistance in heavy-duty applications.

Article ID: 2608608C11

PRODUCT DATASHEET LEGAL NOTE

Please note that the information on this datasheet is provided without warranty and is intended only as non-binding information about the product. Any liability for damages or losses that may arise from the use of this information is excluded. We therefore recommend that you verify the information on this datasheet with other sources before making any decisions based on this information. Additional information about the product can be found on our website.