




Our retail price is a recommendation only. Prices in offer may differ. All prices indicated 0,00 € will follow in the offer.

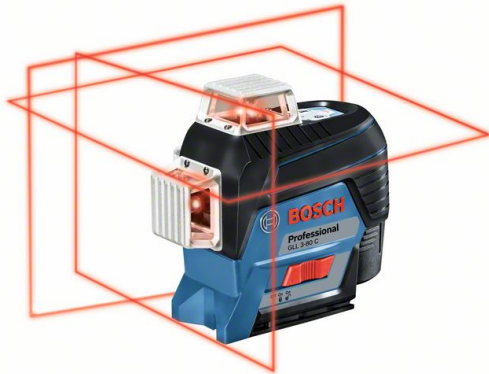

ROBERT BOSCH POWER TOOLS GMBH LINE LASER GLL 3-80 C

SKU: 3165140953849

Line Laser GLL 3-80 C

Categories: [Battery-powered tools](#), [BOSCH professional](#), [Measuring equipment](#), [Networked products and services](#)

Product Features: Battery voltage: 12
Laser diode: Line: 630 - 650 nm, < 10mW
Operating temperature, from: -10 °C
Operating temperature, up to: 40 °C
Operating temperature: -10 - 40 °C
Storage temperature, from: -20 °C
Storage temperature, up to: 70 °C
Storage temperature: -20 - 70 °C
Laser class: 2
Working range, sign: up to
Working range, value: 30 m
Working range: up to 30 m
Working range with receiver, sign: up to
Working range with receiver, value: 120 m
Working range with receiver: up to 120 m
Accuracy: +/- 0.2 mm/m*/** (*for the four horizontal intersection points ; **plus use-dependent deviation)
Self-levelling range: $\pm 4^\circ$
Levelling time: 4 s
Dust and splash protection: IP 54 ***
(***except for the lithium-ion battery and AA1 battery adapter)
Power supply: 12 V Li-Ion battery
Power supply: 4 x 1.5 V LR6 (AA)
Operating time (max.): 8 h (Li-Ion) and 6 h (4 x AA) in 3-line mode
Tripod thread: 1/4", 5/8"
Weight, approx.: 0,9 kg
Colour of laser line: red
Projection: 3 x 360° line
Compatible laser receivers: LR 6 + 7



Product category subdivision: Line Laser
Positioning: Visibility on a new level in 3 x 360°. Simply Connected.

User benefit incl. Reason to believe: Very precise CAL Guard monitoring and remote-control use with Bluetooth®-connected smartphone app

User benefit incl. Reason to believe: High visual clarity is provided by high-powered diodes

User benefit incl. Reason to believe: 3 x 360° lines allow simultaneous horizontal and vertical levelling applications for highly efficient work

Title: Line Laser GLL 3-80 C Professional

Novelty: no

Scope of supply: L-BOXX 136 (1 600 A01 2G0)

Scope of supply: Universal mount BM 1 Professional (0 601 015 A01)

Scope of supply: Laser target plate

Scope of supply: Pouch

Scope of supply: 1 x battery GBA 12V 2.0Ah (1 600 Z00 02X)

Scope of supply: Bracket for laser receiver LR 6/7 (1 608 M00 C1L)

Scope of supply: Laser receiver LR 7 Professional (0 601 069 J00)

Scope of supply: Quick charger GAL 12V-40 Professional (1 600 A01 9R3)

SOL Date: 01.04.2018

Scope of delivery:

1 ST Line Laser GLL 3-80 C |

PRODUCT DESCRIPTION

Line Laser GLL 3-80 C, The line laser GLL 3-80 C Professional is simply connected and projects 3 x 360° lines for excellent visibility. Innovative CAL Guard monitoring and a Bluetooth®-connected smartphone app allow for remote-control use as well as contactless adjustments and high precision. High-powered diodes ensure high visual clarity while its 3 x 360° lines allow simultaneous horizontal and vertical levelling for highly efficient work. This line laser is developed for building floors, installing windows, mounting shelves, laying drainage pipes, building framework for drywall, and laying tiles. Due to the GLL 3-80 C Professional's Dual Power Source, it can be operated both with 12 V Li-ion battery and with standard alkaline batteries for added flexibility. It is capable of levelling itself on non-level surfaces up to +/- 4° in less than 4 seconds with excellent precision of $\pm 0.2 \text{ mm/m}^*/**$ and has a working range of up to 120 m when using the optional LR 6 or LR 7 Professional receiver. This line laser is compact, easy to



handle, and extremely robust. L-BOXX 136 (1 600 A01 2G0); Universal mount BM 1 Professional (0 601 015 A01); Laser target plate; Pouch; 1 x battery GBA 12V 2.0Ah (1 600 Z00 02X); Bracket for laser receiver LR 6/7 (1 608 M00 C1L); Laser receiver LR 7 Professional (0 601 069 J00); Quick charger GAL 12V-40 Professional (1 600 A01 9R3)

Article ID: 0601063R05

PRODUCT DATASHEET LEGAL NOTE

Please note that the information on this datasheet is provided without warranty and is intended only as non-binding information about the product. Any liability for damages or losses that may arise from the use of this information is excluded. We therefore recommend that you verify the information on this datasheet with other sources before making any decisions based on this information. Additional information about the product can be found on our website.