




Our retail price is a recommendation only. Prices in offer may differ. All prices indicated 0,00 € will follow in the offer.

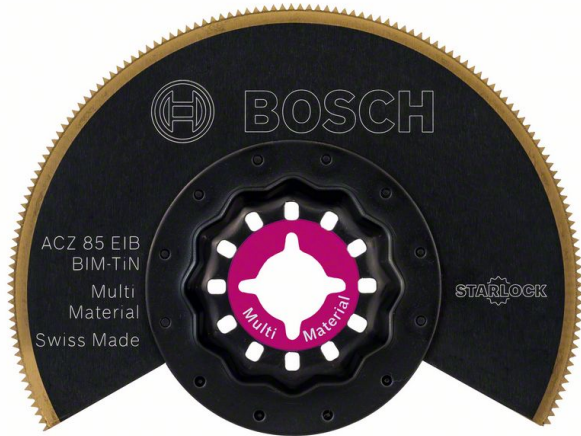

ROBERT BOSCH POWER TOOLS GMBH RB - 10PCS ACZ 85 EIB. FOR OSCILLATING MULTITOOLS

SKU: 3165140935913

RB - 10PCS ACZ 85 EIB. For oscillating multitools

Categories: [Accessories for BOSCH professional](#), [Accessories for multifunctional tools](#), [Saws](#)

Product Features: Material: BIM
Diameter [mm]: 85
Benefit HL (short): 30% Longer Lifetime for Various Materials
Performance Claim Text: 30% Longer Lifetime (Version) Key RTB: TiN-coated tooth strip is very heat- and wear-resistant, providing extra-long performance
Specific RTB1: Boschs patented circular welding technology creates tough freestanding teeth, preventing jams and increasing usage
Specific RTB2: Pointed segment saw blade ends enable cutting right into tight corners
Specific RTB3: Starlock Snap-In mounting system for fast blade removal and exchange within 3 seconds without having to touch the blade
Material: Drywall board
Material: Metal sandwich
Material: Solid Laminate Vinyl, PVC
Material: Plastics
SOL Date: 01.09.2017
Novelty: no
Novelty until: 01.03.2018

Scope of delivery:
1 ST RB - 10PCS ACZ 85 EIB. For oscillating multitools |



PRODUCT DESCRIPTION

The titanium-coated Starlock ACZ 85 EIB blade has an extra 30% longer lifetime than uncoated BIM (bi-metal) blades. Its TiN (titanium-nitride) coated tooth strip is very heat- and wear-resistant, ensuring extra-long performance. Bosch's patented circular welding technology creates tough freestanding teeth, preventing jams and burn marks and allowing for extended usage. Use for plunge cutting in plasterboard, cement-bonded fibre boards, wood, non-hardened metal, small mouldings, fibreglass and epoxy-reinforced plastic. The pointed segment saw blade ends enable cutting right into tight corners. The Starlock Snap-In mounting system allows fast blade removal and exchange within 3 seconds without having to touch the blade. The mounting system produces the highest power transfer thanks to a 3-dimensional tight-fitting connection between machine and accessory.

Article ID: 2608664478

PRODUCT DATASHEET LEGAL NOTE

Please note that the information on this datasheet is provided without warranty and is intended only as non-binding information about the product. Any liability for damages or losses that may arise from the use of this information is excluded. We therefore recommend that you verify the information on this datasheet with other sources before making any decisions based on this information. Additional information about the product can be found on our website.