




Our retail price is a recommendation only. Prices in offer may differ. All prices indicated 0,00 € will follow in the offer.

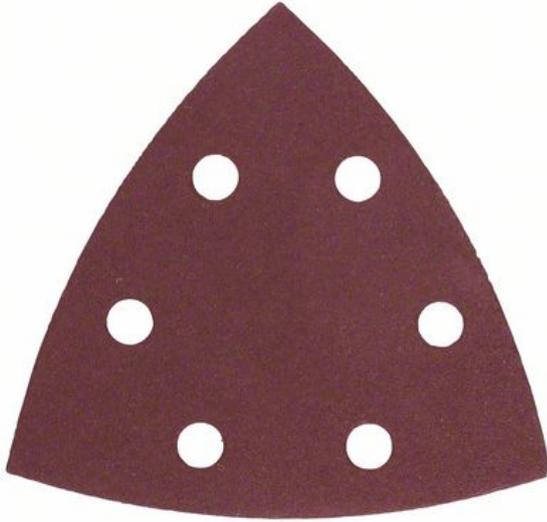

**ROBERT BOSCH POWER TOOLS GMBH  
SANDING SHEET F460  
BFWP,G240,93MM. FOR OSCILLATING  
MULTITOOLS**

**SKU:** 3165140959919

Sanding Sheet F460 BfWP,G240,93mm. For oscillating multitools

---

**Categories:** [Accessories for BOSCH professional](#), [Accessories for multifunctional tools](#), [Grinding and polishing](#)

**Product Features:** Sheet dimensions, width mm: 93

Sheet dimensions, length mm: 93

Sheet dimensions mm: 93x93

Grit: 240

Perforation: 6 holes

Benefit HL (short): Quality Finish

Performance Claim Text: Exceptional Finish (Version) Key RTB: Durable F-/E backing paper for continuous work and professional finishes

Specific RTB1: High-quality semi-friable aluminium oxide and silicon carbide for precision material removal with perfect results

Specific RTB2: Electrostatically open-coated, and removes material with precision for optimal sanding behaviour

Specific RTB3: Fully synthetic resin binding on F-/E paper for wear resistance and long performance lifetime

Material: Paint on wood

Material: Hardwood

Material: Solid wood furniture board

Material: Parquet

Material: Multiplex board

Material: Particleboard

Material: Plastic coated boards

Product text, Accessories grey: Pack of 5



SOL Date: 01.01.2019

Novelty: no

Novelty until: 01.07.2019

Scope of delivery:

5 ST Sanding Sheet F460 BfWP,G240,93mm.

For oscillating multitools |

## PRODUCT DESCRIPTION

The F460 Best for Wood and Paint produces an exceptional finish when keying and sanding wood as well as painted surfaces. Its F-/E backing paper is extremely durable, enabling continuous work and professional finishes. Furthermore, its high-quality semi-friable aluminium oxide and silicon carbide abrasive grit removes material with precision for perfect surface results. It is intended for flush sanding of edges and edge-strips and working on small surface pieces, as well as medium and fine sanding for surfaces, edges and rebates. It is also ideal for keying and the intermediate sanding of primers, fillers and varnishes. This sheet is coated with tough semi-friable aluminium oxide and silicon carbide for consistent surface quality. It is electrostatically open-coated and removes material with precision for optimal sanding behaviour. Furthermore, the grit is bonded using fully synthetic resin on the F-/E backing paper for wear resistance in heavy-duty applications, enabling a long performance lifetime.

Article ID: 2608621689

### PRODUCT DATASHEET LEGAL NOTE

Please note that the information on this datasheet is provided without warranty and is intended only as non-binding information about the product. Any liability for damages or losses that may arise from the use of this information is excluded. We therefore recommend that you verify the information on this datasheet with other sources before making any decisions based on this information. Additional information about the product can be found on our website.